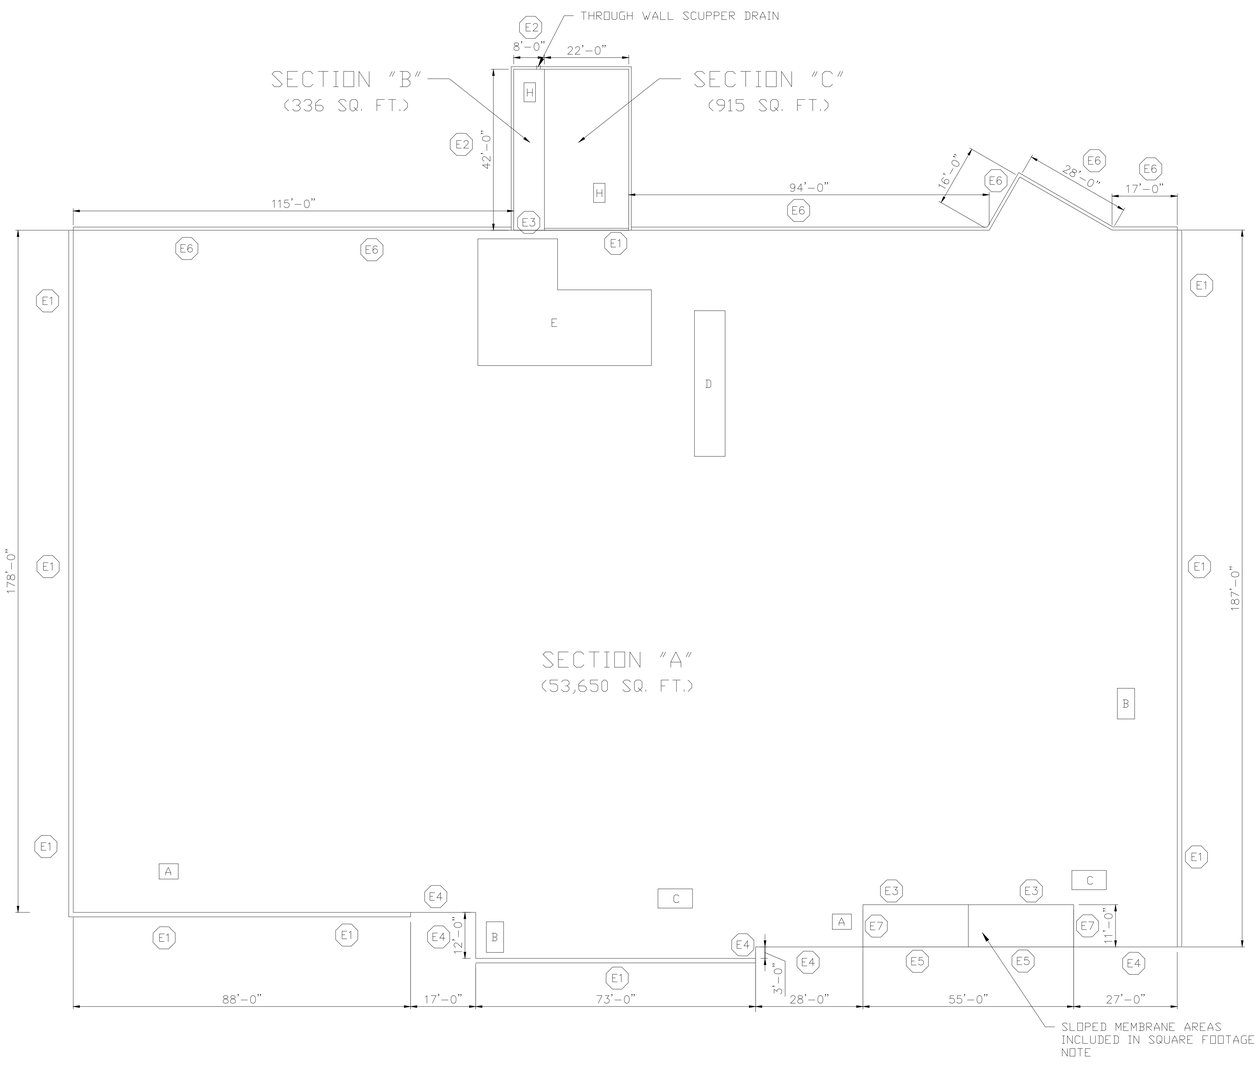

ROOF PLAN

EDGE CONDITION LEGEND

E1 – 2'-6" (H) TO 3'-0" (H)(VARIES) X 1'-3" (W)PARAPET WALL
REMOVE EXISTING METAL COPING AND ALL WALL FLASHINGS.
INSTALL FULLY ADHERED WALL FLASHING UP OVER EXIST.
TOP PLATE AND DOWN FRONT FACE, INSTALL NEW TWO PIECE
METAL FASCIA (SEE DET. d001)

E2 – 1'-0" (H) PARAPET WALL
REMOVE EXISTING METAL COPING AND ALL WALL FLASHINGS.
INSTALL FULLY ADHERED WALL FLASHING UP OVER EXIST.
TOP PLATE AND DOWN FRONT FACE, INSTALL NEW TWO PIECE
METAL FASCIA (SEE DET. d001)

E3 – 1'-0" (H) WALL FLASHING, REMOVE ALL FLASHINGS
FULLY ADHERE NEW WALL FLASHING, INSTALL TERM BAR,
SEALANT AND NEW SURFACE MOUNTED COUNTER FLASHING
W/ SEALANT JOINT (SEE DET d002)

E4 – 2'-0" (H) WALL FLASHING, REMOVE ALL FLASHINGS
LEAVING METAL COUNTER FLASHING TO REMAIN.
FULLY ADHERE NEW WALL FLASHING, INSTALL TERM BAR,
SEALANT AND SLIP FLASHING TO BACKSIDE OF
EXISTING VINYL SIDING (SEE DET d003)

E5 – CUT BOTTOM EDGE OF EXISTING VINYL SIDING TO MAINTAIN
8" (H) MIN. WALL FLASHING, REMOVE ALL FLASHINGS
FULLY ADHERE NEW WALL FLASHING, INSTALL TERM BAR,
SEALANT AND SLIP FLASHING TO BACKSIDE OF
EXISTING VINYL SIDING (INSTALL NEW "J" TRIM AT BOTTOM
CUT EDGE OF SIDING (SEE DET d003)

E6 – REMOVE EXIST. DRIP EDGE METAL AND GUTTER
INSTALL NEW WOOD BLOCKING AND TAPERED EDGE STRIP
TO MATCH HEIGHT OF NEW ROOF SYSTEM, TO PROMOTE
DRAINAGE INTO GUTTER AND PREVENT PONDING ALONG ROOF
EDGE. INSTALL NEW 10" X 10" BOX GUTTER W/ (1)
DOWNSPOUTS IN ORIGINAL LOCATIONS & CONFIGURATIONS
(SEE DET d004)

E7 – 4'-0" (H) TRANSITION BETWEEN ROOF LEVELS REMOVE
EXIST. WALL FLASHINGS, INSTALL NEW ADHERED
FLASHING FULL HEIGHT AND TIE-INTO FIELD MEMBRANE
ON BOTH SIDES OF VERT. TRANSITION

Penetrations List:
Curbs
A - 4'x5' RTU
B - 4'6"x8' RTU
C - 5'x9' RTU
D - 8'x38' RTU
E - Exhaust Fans on I-Beams with 20 I-Beam Support Posts (round 6"). I-Beams are 20'x46'.
H - Roof Hatch 3'x5' (Replace)
J - 4'x4' RTV

Pipe Penetrations
1" - 12
2" - 7
3" - 3
4" - 5
5" - 1

1'6"x1'6" RTV - 3
4'x4' Sat Dish Pad - 1 (Set on walk pad)
7'x7' Sat Dish Pad - 1 (Set on walk pad)
3'x3' Sat Dish Pad - 2 (Set on walk pad)
1'x1' RTV - 1
2.5'x2.5' RTV - 2
2'x2' RTV - 3
11" Round Vent Stack - 3
6" Round Vent Stack - 3

General Notes

ROOFING PROJECTS

DISCLAIMER

ALL IDEAS, DESIGNS ARRANGEMENTS, AND PLANS INDICATED OR REPRESENTED BY THIS DRAWING ARE OWNED BY, AND ARE THE PROPERTY OF ROOFINGPROJECTS.COM AND WERE CREATED, PROVIDED AND DEVELOPED FOR USE ON AND IN CONNECTION WITH THE SPECIFIED PROJECT. NO IDEAS, DESIGNS, ARRANGEMENTS OR PLANS SHALL BE USED BY OR DISCLOSED TO ANY PURPOSE WHATSOEVER WITHOUT THE WRITTEN PERMISSION OF ROOFINGPROJECTS.COM.

WRITTEN DIMENSIONS ON THIS DRAWING SHALL TAKE PRECEDENCE OVER SCALED DIMENSIONS. CONTRACTORS SHALL VERIFY AND BE RESPONSIBLE FOR ALL DIMENSIONS AND CONDITIONS ON THE JOB AND THIS OFFICE MUST BE NOTIFIED OF ANY VARIATIONS FROM THE DIMENSIONS AND CONDITIONS SHOWN BY THESE DRAWINGS.

No.	Revision/Issue	Date

Firm Name and Address

RoofingProjects-com
17 High Street
Suite 301
Norwalk,CT
06851

Project Name and Address

ACME #1063
3101 NY-22
Patterson, NY 12563

Project

Date
March 5, 2024

Scale
1/16" = 1'-0"

Sheet
1