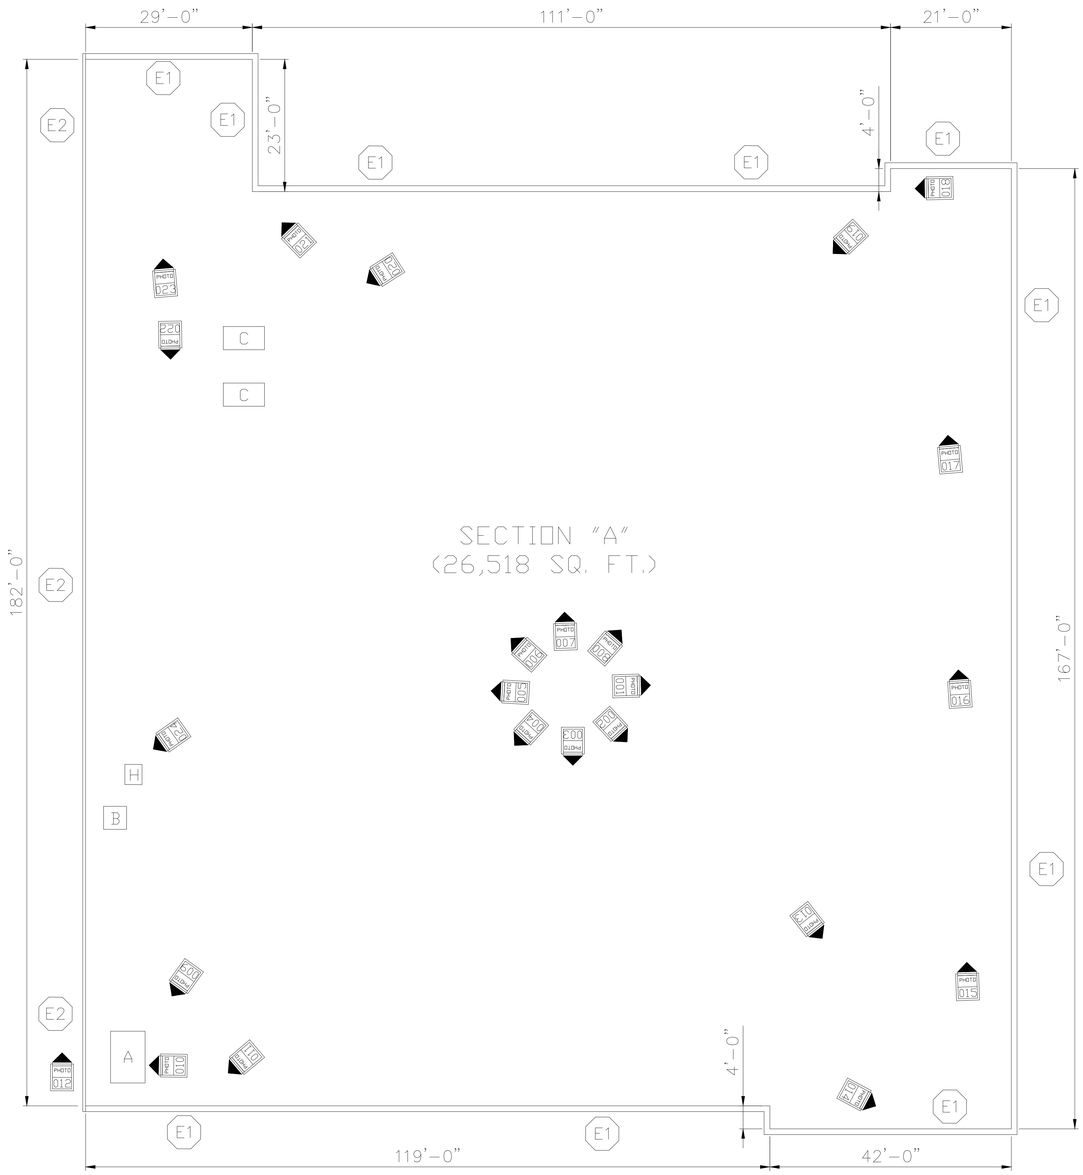

ROOF PLAN

EDGE CONDITION LEGEND

E1 – 1'-0" (H) TO 2'-6" (H)(VARIES) PARAPET WALL
REMOVE EXISTING EDGE METAL AND ALL WALL FLASHINGS.
INSTALL FULLY ADHERED WALL FLASHING UP OVER EXIST.
TOP PLATE AND DOWN FRONT FACE, INSTALL NEW TWO PIECE
METAL FASCIA (SEE DET. d001)

E2 – REMOVE EXIST. DRIP EDGE METAL AND GUTTER
INSTALL NEW WOOD BLOCKING AND TAPERED EDGE STRIP
TO MATCH HEIGHT OF NEW ROOF SYSTEM, TO PROMOTE
DRAINAGE INTO GUTTER AND PREVENT PONDING ALONG ROOF
EDGE. INSTALL NEW 8" X 8" BOX GUTTER W/
DOWNSPOUTS IN ORIGINAL LOCATIONS & CONFIGURATIONS
(SEE DET d002)

Penetrations List:
Curbs
A - 6'x9' curb with no top open vent curb
B - 4'x4' RTV
H - Roof Hatch 3'x3.5' (Replace)
C - 6' long equipment support curbs (2)

Pipe Penetrations
2" - 5
3" - 5

6'X6' Sat Dish Pad - 1 (Set on walk pad)
6" Sat Dish Pad Penetration - 1
10" Round Vent Stack - 1
8" Round Vent Stack - 1
2'x2' RTV - 1
2.5'x2.5' RTV - 1
2.5'x2.5' Kitchen Exhaust Fan - 1
(2) 8.5' Long Wood Blocks with Condenser on top connected to 1' round Pitch Box with Conduits - 3
(Replace wood w/ P.T. wood set on walk pads)
6" round Goose Neck Pipe with Conduits connected to 1'x3' condenser resting on roof - 1
3.5' long equipment support curb - 1
4.5'x4.5' sat dish pad - 1 (Set on walk pad)

General Notes

RP ROOFING PROJECTS

DISCLAIMER.

ALL IDEAS, DESIGNS ARRANGEMENTS, AND PLANS INDICATED OR REPRESENTED BY THIS DRAWING ARE OWNED BY, AND ARE THE PROPERTY OF ROOFINGPROJECTS.COM AND WERE CREATED, EVOLVED AND DEVELOPED FOR USE ON AND IN CONNECTION WITH THE SPECIFIED PROJECT . NONE OF SUCH IDEAS, DESIGNS, ARRANGEMENTS OR PLANS SHALL BE USED BY OR DISCLOSED TO ANY PURPOSE WHATSOEVER WITHOUT THE WRITTEN PERMISSION OF ROOFINGPROJECTS.COM.

WRITTEN DIMENSIONS ON THIS DRAWING SHALL TAKE PRECEDENCE OVER SCALED DIMENSIONS. CONTRACTORS SHALL VERIFY AND BE RESPONSIBLE FOR ALL DIMENSIONS AND CONDITIONS ON THE JOB AND THIS OFFICE MUST BE NOTIFIED OF ANY VARIATIONS FROM THE DIMENSIONS AND CONDITIONS SHOWN BY THESE DRAWINGS.

No.	Revision/Issue	Date

Firm Name and Address

RoofingProjects-com
17 High Street
Suite 301
Norwalk,CT
06851

Project Name and Address

Safeway #1358
5101 Wilson Blvd
Arlington, VA 22205

Project

Date
April 5, 2024

Scale
3/32" = 1'-0"

Sheet
1